


Themis (2BCHT)

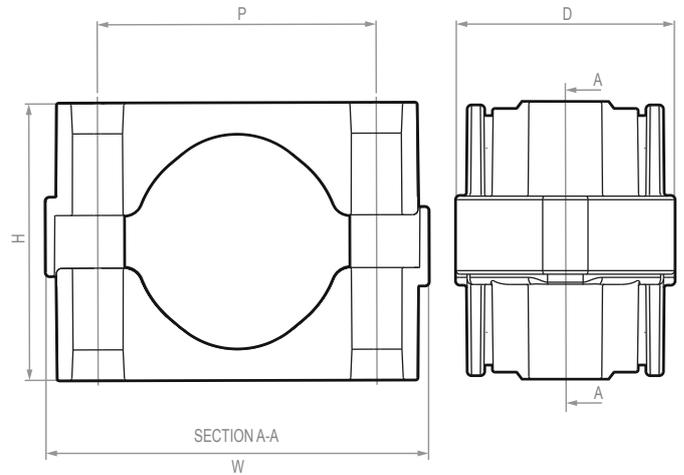

The CMP Products Themis Heavy Duty, Two Bolt, High Temperature Fire Rated Stainless Steel single cable cleat which has been designed, constructed, and tested in accordance with the International Standard 'Cable Cleats for Electrical Installations' (IEC 61914). It ensures the retention and securing of single cables, without damaging or deforming the cable.

These Fire Rated cable cleats can be used with fire performance cables to ensure the safe retention and securing of single cables in the event of a wiring system being affected by fire. These fire resisting supports help to maintain the electrical systems integrity for any critical circuits during an emergency situation to enable safe evacuation. The cable cleat is manufactured from Stainless Steel 316L making it suitable for both indoor and outdoor applications.

Due to its unique twin arc internal patent pending design profile it exhibits excellent retention, limiting both the axial and lateral movement. The Themis Two Bolt cable cleats have an excellent range take and are suitable for cable diameters of 38mm up to 97mm in only five sizes. This cable cleat has two M12 clearance holes for securing it to a mounting surface, which allows for either M10 or M12 fasteners to be used.

Features

- 316L Stainless Steel
- Operating temperature -60°C to +250°C
- Surpasses requirements of Fire testing BS5839 / BS8491 / BSEN50200 / BS8434 (950°C) (Fire, shock & water)
- 38 - 97mm cable range take in 5 sizes
- Two bolt fixing design
- Can be stacked
- Excellent axial & lateral load retention
- Corrosion resistant

BS 5839 'Fire detection and fire alarm systems for buildings. Code of practice for design, installation, commissioning and maintenance of systems in non-domestic premises'

States that "Methods of cable support should be non-combustible and such that circuit integrity will not be reduced below that afforded by the cable used, and should withstand a similar temperature and duration to that of the cable, while maintaining adequate support"

To adhere to this BSI standard fire rated Cable Cleats must be used to support the cable in the event of a fire

Technical Data & Classification	
Type	6.1.1 Metallic 2BCHT - Two Bolt High Temperature Stainless Steel Cable Cleat
Design Specification	IEC 61914
Temperature for permanent application	-60°C to +250°C IEC 61914
Fire Tested	Surpasses requirements of BS5839 & B8491 (950°C) (Fire, shock & water)
Needle Flame Test	Pass - 120 second flame application time IEC 61914, IEC 60695-11-5
Lateral Load Test	25kN IEC 61914
Axial Load Test	5kN IEC 61914
Impact Resistance	Pass - Very Heavy IEC 61914
Material	316L Stainless Steel
Material Colour	Silver / grey

For information regarding short circuit ratings for Themis please contact CMP products directly at customerservices@cmp-products.com

Cable cleat selection table

Themis Part No.	Cable Ø range take (mm)	Dimensions mm					Weight (g)
		W	H	D	P	Fixing Hole Ø	
2BC038048HT	38 - 48	96	68	61	67	2 x M10 / M12	742
2BC048058HT	48 - 58	107	78	61	78	2 x M10 / M12	900
2BC058070HT	58 - 70	119	91	61	90	2 x M10 / M12	1102
2BC070083HT	70 - 83	133	104	61	104	2 x M10 / M12	1324
2BC083097HT	83 - 97	147	118	61	118	2 x M10 / M12	1554

Fasteners required to secure the cable cleat to the support structure are not included with the ordering references shown in the selection table but can be supplied on request.