

Conqueror (RTSS cable cleat)



Features


- Third party certification to IEC 61914:2009
- 316L stainless steel
- 19 - 130mm in 16 sizes for trefoil formation / application
- Short circuit rating of 170kA peak fault
- Operating temperature -50°C to +60°C
- Standard liners which are classified as Low Smoke & Fume (LSF), Zero Halogen (LSOH) and Phosphorus Free
- Combined single (M12) and two bolt (M10) fixing design

CMP Products Conqueror cable cleats are metallic cable cleats which have been designed, constructed, and tested in accordance with the International Standard 'cable cleats for Electrical Installations' IEC 61914:2009. The Conqueror cable cleat has been designed to restrain a large cable range take, and tested for exceptionally high short circuit conditions on cables held in trefoil application / formation, to ensure the securing and retention of cables without damage.


Conqueror is unique with its patent pending adjustable hinge. The movement of this hinge virtually doubles the range take adjustment when compared to other fixed hinged products on the market. Conqueror covers a range of cable diameters from 19mm up to 130mm in only 16 sizes. The cable cleat is fabricated from 316L stainless steel, giving it high creep strength whilst providing excellent corrosion resistance in the harshest of environments.

The Conqueror cable cleat has one M12 and two M10 fixing clearance holes within its base, allowing versatility to the installer during installation, and is designed to enable the product to be secured to a variety of mounting surfaces. The cable cleat hinge opens fully, allowing the cables to be easily placed within the cable cleat, to aid the installer before closing and securing via the mouth piece bolt.

The standard liners help to restrain the cables within vertical applications, providing a layer of protection between the cable sheath and the cable cleat during normal operation, where thermal elongation of cable occurs, protecting the cable from chafing on any mounting surface due to differential movements such as those found in marine and offshore applications. The standard liners also assist in the extra protection of cables in the event of short circuit fault conditions and are classified as Low Smoke & Fume (LSF), Zero Halogen (LSOH) and Phosphorus Free.

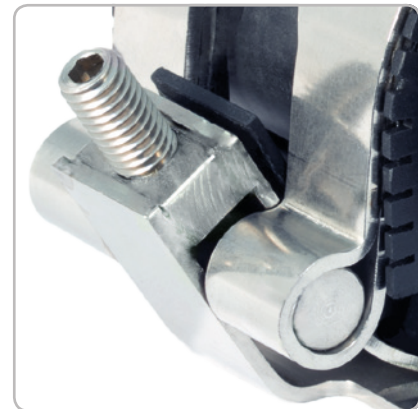

Technical Data

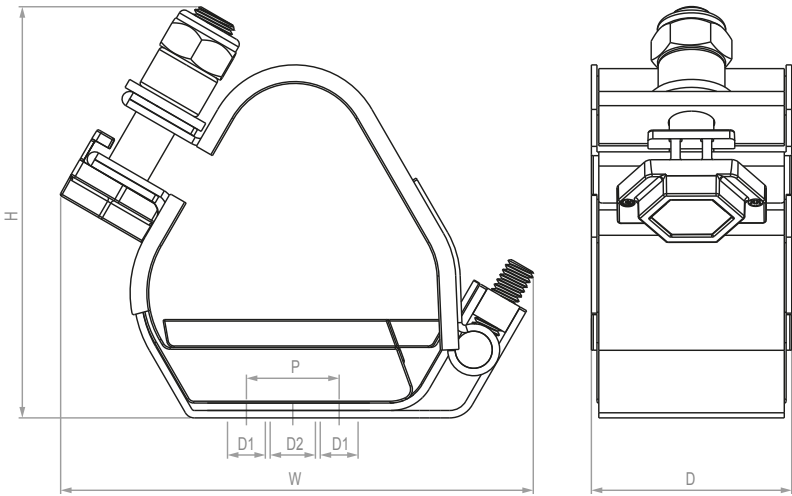

Technical Data & Classification	
Type	6.1.3 Composite RTSS - Range Taking Stainless Steel
Design Specification	IEC 61914:2009
Temperature for permanent application	-50°C to +60°C IEC 61914:2009 clause 6.2
Needle Flame Test	Pass - 120 second flame application time IEC 61914:2009 clause 10.0, 10.1, IEC 60695-11-5
Lateral Load Test	Refer to CMP Products, IEC 61914:2009 clause 9.3
Axial Load Test	0.9kN - 1.1kN, IEC 61914:2009 clause 9.4
Impact Resistance	Pass - Very heavy IEC 61914:2009 clause 6.3, 6.3.5, 9.2
Material	316L Stainless Steel with Standard Liner Standard liners are classified as Low Smoke & Fume (LSF), Zero Halogen (LS0H) and Phosphorus Free

300mm CAT 1 Conqueror RTSS (0.1 sec)	
Cable OD (mm)	Peak kA
36	170.0
38	174.6
43	185.7
59	217.6
65	228.4

Short Circuit Testing to IEC 61914:2009 - Clause 9.5				
Trefoil Formation				
One short circuit (6.4.3) 300mm fixed cleat centres	One short circuit (6.4.3) 300mm fixed cleat centres	Two short circuits (6.4.4) 600mm fixed cleat centres	One short circuit (6.4.3) 600mm fixed cleat centres	Two short circuits (6.4.4) 600mm fixed cleat centres
0.1 sec	1 sec	0.1 sec	3 sec	1 sec
170kA Peak	90kA Peak	131kA Peak	61kA Peak	80kA Peak
77.3kA RMS	43.2kA RMS	59.6kA RMS	29.1kA RMS	38.1kA RMS

Cable cleat selection table

Conqueror Part No.	Cable Ø Range Take (mm)	Dimensions (mm)						Weight (g)
		W	H	D	P	Fixing Hole Ø		
						D1	D2	
RTSS019023	19-23	99	84	54	25	2 x M10	1 x M12	420
RTSS023032	23-32	122	99	54	25	2 x M10	1 x M12	509
RTSS030039	30-39	126	111	54	25	2 x M10	1 x M12	534
RTSS037046	37-46	132	117	54	25	2 x M10	1 x M12	557
RTSS044053	44-53	151	128	54	50	2 x M10	1 x M12	676
RTSS051060	51-60	154	139	54	50	2 x M10	1 x M12	694
RTSS058067	58-67	157	151	54	50	2 x M10	1 x M12	727
RTSS065074	65-74	176	163	54	75	2 x M10	1 x M12	839
RTSS072081	72-81	182	175	54	75	2 x M10	1 x M12	866
RTSS079088	79-88	191	190	54	75	2 x M10	1 x M12	900
RTSS086095	86-95	216	202	54	75	2 x M10	1 x M12	1023
RTSS093102	93-102	222	215	54	75	2 x M10	1 x M12	1050
RTSS100109	100-109	228	228	54	75	2 x M10	1 x M12	1079
RTSS107116	107-116	254	241	54	75	2 x M10	1 x M12	1199
RTSS114123	114-123	257	254	54	75	2 x M10	1 x M12	1228
RTSS121130	121-130	268	267	54	75	2 x M10	1 x M12	1255

Fasteners required to secure the cable cleat to the support structure are not included with the ordering references shown in the selection table but can be supplied on request.